
SHINING 3D
DENTAL

Easy Post-Processing with FabCure 1S

FabCure 1S is recommended as the standard post-curing tool for all printers

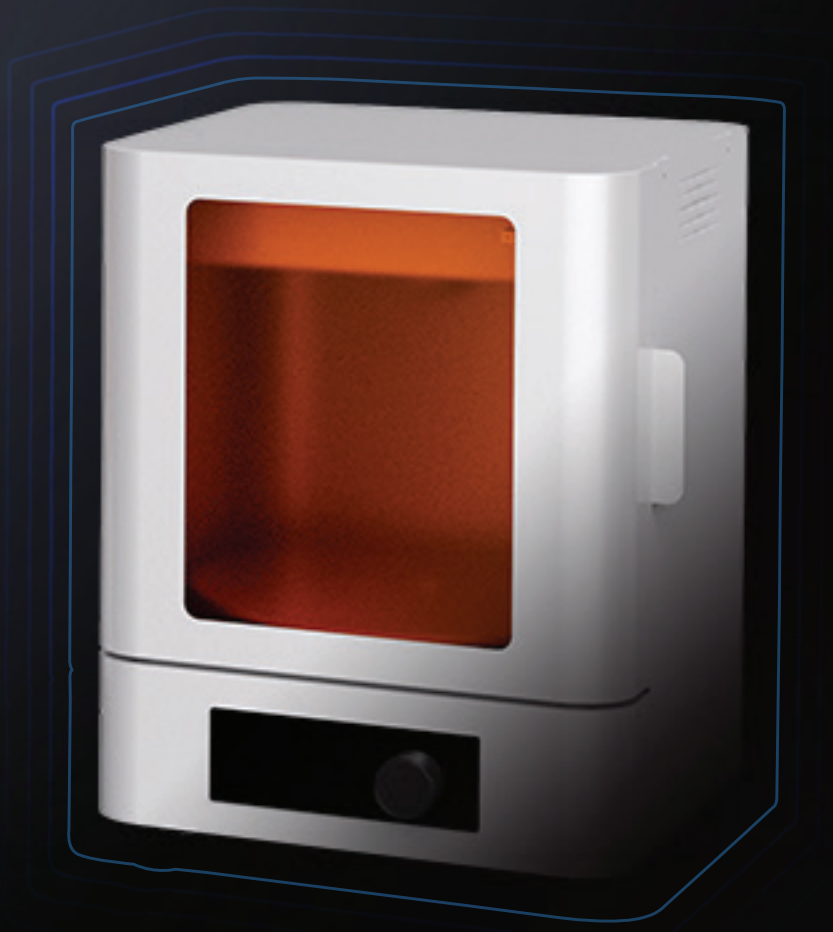

SHINING3DDENTAL.COM

EASY OPERATION

Put the parts in the box and rotate the knob to set the curing time

UNIFORM EXPOSURE

A rotating turntable with 10r/min ensures uniform exposure during post-curing

OPTIMUM MECHANICAL & FLEXURAL PROPERTIES

The FabCure 1S maximizes the mechanical & flexural properties of the parts for further operation of dental workflows.

TECHNICAL SPECIFICATIONS
FabCure 1S

Dimensions(W/D/H)	180x190x233 mm
Weight	3.92 kg
Turntable Diameter	165 mm
Maximum Part Height	100 mm
Operating Temperature	10 ~ 30 °C
Power	DC 24 V 2.5 A 60 W
Light Source	UV LED
Wavelenght	405 nm
Led Power	30 W

*Notice: SHINING 3D reserves the right to introduce modifications or alterations to any of the specifications and images used in this document.

SHINING 3D DENTAL

sales@shining3d.com
www.shining3ddental.com

FabCure 1S- EN 20231128- V0.1 | Copyright © 2004-2023. All Rights Reserved